

MD-7304R**7" Quad View Monitor with Recording****Features:**


- High-Brightness 7" HD Display with 800 nit LED backlight
- Wide Voltage compatibility support 9-36 V input.
- Multi-signal and Tigger integration
- Quick boot up time
- Built-in Recording Function

Application: Commercial Vehicle**Specifications****V1**

Model Number	MD-7304R
Backlight	LED Backlight
Brightness	800 nit
Resolution	1024 RGB (H) × 600 (V) pixels
Contrast Ratio	800:1
Boot up time	3 seconds
Video input signal	CVBS; AHD 720p, 1080p (25 / 30 fps)
Video input channel	Up to 4 channels (Quad split viewing)
Audio output	Built-in speaker
Channel image orientation	Mirror
Reverse / Channel trigger	4 x trigger inputs for CAM1/2/3/4
Video and Audio Recording	Up to 4 channels
Video recording format	AVI
Storage Media	Micro SD card (Support Max. 512GB)
Power	
Operation Voltage	DC 9-36 V
Power consumption	400mA ± 10% (12V)
Mechanical	
Vibration Resistance	10 G
Structure	ABS Plastic
Dimension	195 x 62 x 129 mm (7.68 x 2.44 x 5.08 in)
Net weight	715 g (1.58 lbs.)
Environmental	
Working temperature	-20°C to +70°C (-4°F to +158°F)
Storage temperature	-30°C to +80°C (-22°F to +176°F)
Certification	FCC Part 15B

Dimensions

Unit:mm

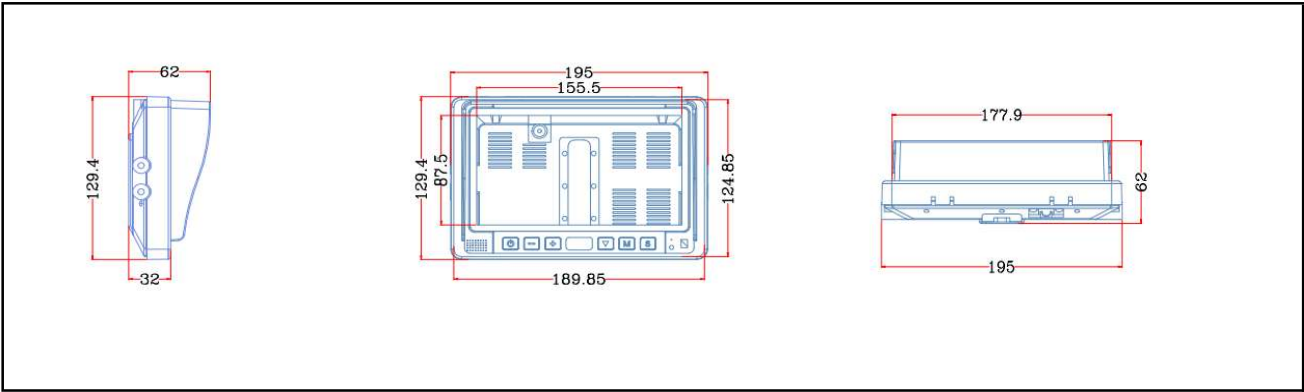

Packaging

Accessories	Base Stand Power and camera cable Manual
Packaging Dimensions	280 x 230 x 80 mm (11.02 x 9.06 x 3.15 in)
Case Pack Dimensions	430 x 310 x 480 mm (16.93 x 11.81 x 18.90 in)
Num of items - Case pack	10
Gross weight - Case Pack	11 kg (24.25 lbs.)