

MD-1061R**10.1" Six View Monitor with Recording****Features:**


- High-Brightness 10.1" HD Display with 800 nit LED backlight
- Multi channel & Tigger supported
- Quick boot up time
- Built-in Recording Function

Application: Commercial Vehicle**Specifications****V1**

Model Number	MD-1061R
Backlight	LED Backlight
Brightness	800 nit
Resolution	1024 RGB (H) × 600 (V) pixels
Contrast Ratio	800:1
Boot up time	3 seconds
Video input signal	CVBS; AHD 720p, 1080p (25 / 30 fps)
Video input channel	Up to 6 channels (with Audio, 6-way split camera display)
Audio output	Built-in speaker
Channel image orientation	Mirror
Reverse / Channel trigger	5 x trigger inputs for CAM2/3/4/5/6
Video and Audio Recording	Up to 6 channels
Video recording format	AVI
Storage Media	Micro SD card (Support Max. 512GB)
Power	
Operation Voltage	DC 12-32 V
Power consumption	710mA ± 10% (12V)
Mechanical	
Vibration Resistance	10 G
Structure	ABS Plastic
Dimension	222.5 x 66.5 x 171.6 mm (8.76 x 2.62 x 6.76 in)
Net weight	1200 g (2.65 lbs.)
Environmental	
Working temperature	-20°C to +70°C (-4°F to +158°F)
Storage temperature	-30°C to +80°C (-22°F to +176°F)
Certification	FCC Part 15B

Dimensions

Unit:mm

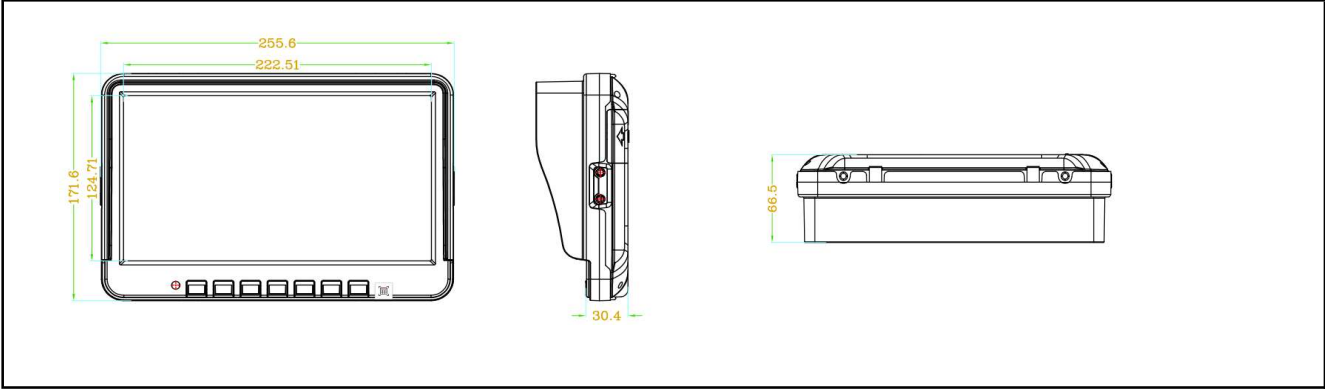

Packaging

Accessories	Base Stand Power and camera cable Manual
Packaging Dimensions	350 x 210 x 100 mm (13.78 x 8.27 x 3.94 in)
Case Pack Dimensions	530 x 350 x 430 mm (20.87 x 13.78 x 16.93 in)
Num of items - Case pack	10
Gross weight - Case Pack	18 kg (39.68 lbs.)