

SC-446**Side Mount Camera****Features:**


- Supports side mirror, fender and side mounting with lens rotation for angle adjustment.
- Supports switching to 720P via wire cutting.

Application: Light to Heavy duty Vehicle Side Mount**Specifications****V1**

Model Number	SC-446
Image sensor	1/2.9 CMOS
Effective pixels	1920 (H) x 1080 (V)
Minimum illumination	0.001 Lux / F1.2
Image View (Default)	Mirror
Viewing Angle	Horizontal 111°
	Vertical 60°
Power	
Operation Voltage	DC 12V
Power consumption	80 ± 8 mA
Mechanical	
Waterproof Level	IP67
Vibration Resistance	Complies with QC/T 531 (10~25 Hz/1.2 mm, 25~500 Hz/30 m/s ² , 3 axes × 8 h)
Structure	Aluminum alloy for camera body, ABS plastic for support bracket
Dimension	50.62 x 63 x 103.85 mm (1.99 × 2.48 × 4.09 in)
Net weight	151 g (0.33 lbs.)
Environmental	
Working temperature	-20°C to +80°C (- 4°F to + 176°F), 90% RH
Storage temperature	-30°C to +85°C (- 22°F to + 185°F), 95% RH

Dimensions

Unit:mm

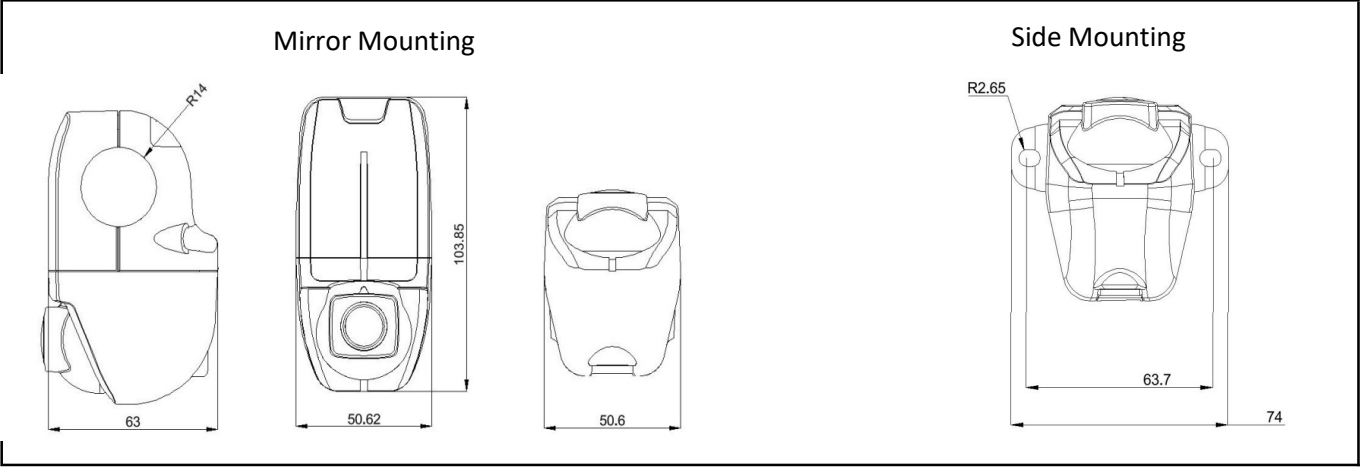

Packaging

Accessories	Mirror mount clamps Side Mounting base 25mm mirror mount bracket 22mm mirror mount bracket screw pack
Packaging Dimensions	150 x 100 x 70(mm) / 5.91 x 3.94 x 2.76 (in)
Case Pack Dimensions	530 x 320 x 230(mm) / 20.87 x 12.60 x 9.06 (in)
Num of items - Case pack	30
Gross weight - Case Pack	9.5 kg (20.94 lbs.)

